


C197 Standard Crack Monitor Gauge Attaching Instructions

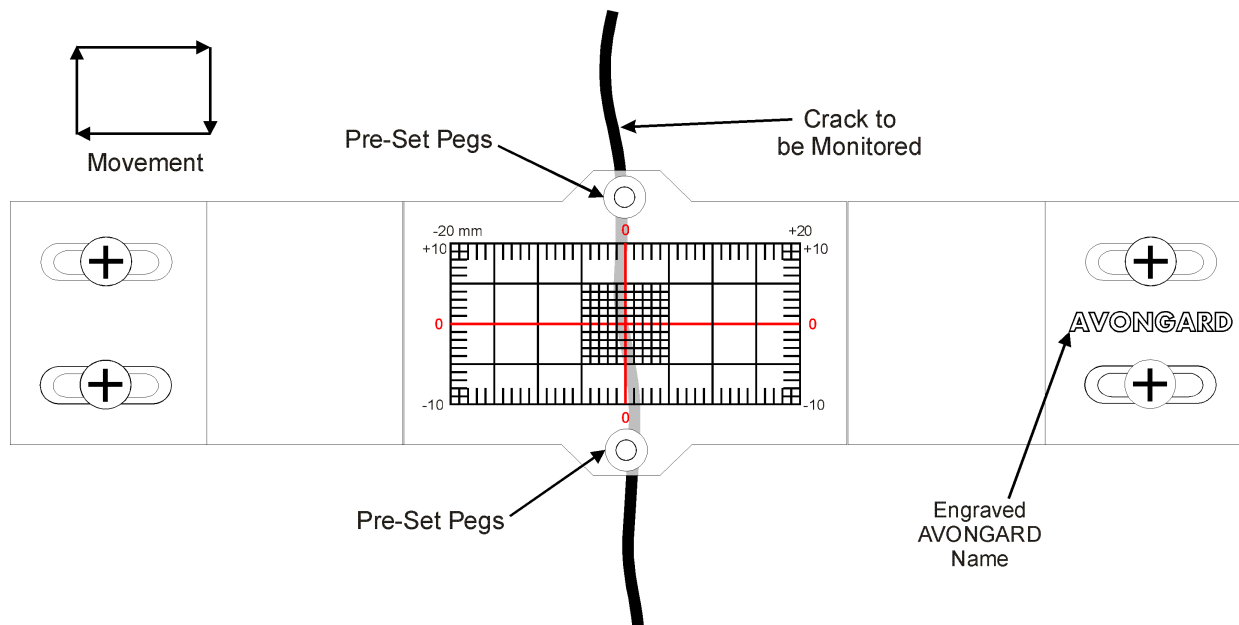

1. To install gauge, use the screw type mounting kit (part # [C197MNTKIT](#)) or epoxy adhesive.
2. Affix the gauge over the crack to be monitored, ensuring the vertical red "0" line is centered over the crack.
3. The gauge should be mounted with the engraved AVONGARD name on the right-hand side of the crack.
4. Remove the two pre-set pegs.
5. As the crack opens or closes, the red crosshair lines will move relative to the measurement scale.
6. Record measurements on the accompanying "Crack Monitoring Record".
Additional forms are available at www.AtlanticSupply.com
See Part # *Crack Monitor Form*

LARGO
800-752-9416

RIVIERA BEACH
800-535-7384

ORLANDO
800-569-8950

JACKSONVILLE
888-260-5584

ALABAMA
866-917-3447

C197 Crack Monitoring Record

Job Name (Job #): _____ City: _____

Crack Monitor's Location: _____


Crack Monitor Reference # _____ Installation Date: _____

After measurement of the crack using the Crack Width Gauge (C198), indicate on the diagrams below the crack monitor movement at each reading.


- + Represents crack opening, and
- Represents crack closing on the horizontal scale

Additional forms available at www.AtlanticSupply.com See Part # Crack Monitor Form


Date of Reading: _____

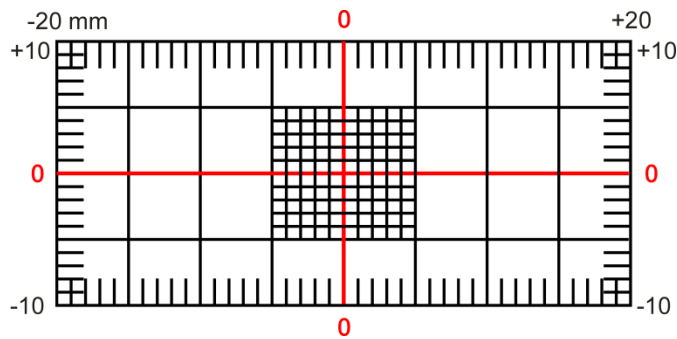


Date of Reading: _____

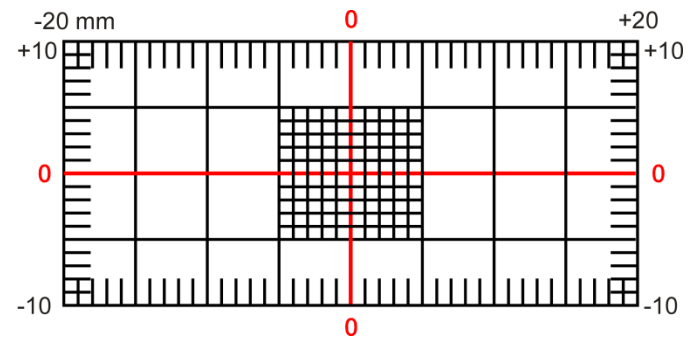


Date of Reading: _____

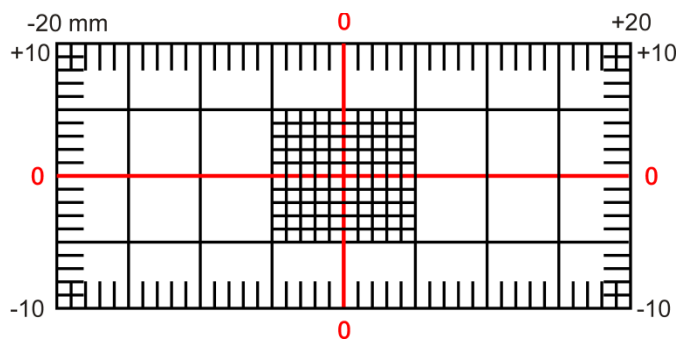

Date of Reading: _____

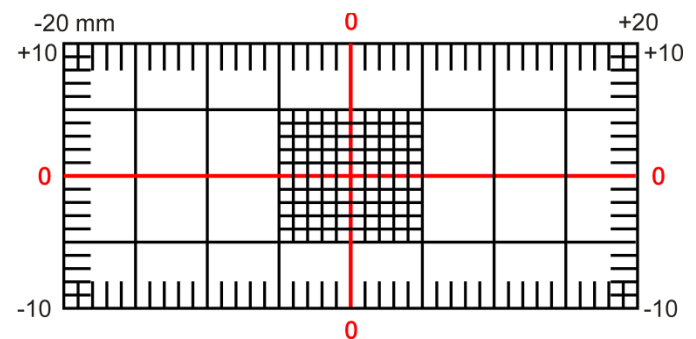

Date of Reading: _____

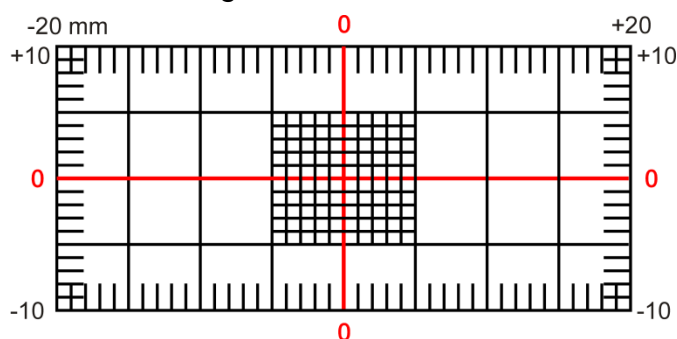

Date of Reading: _____

